




Nominal power	kW	10
Reduced power	kW	3
Nominal water useful power	kW	-
Reduced water useful power	kW	-
Nominal efficiency	%	91
Reduced efficiency	%	94,5
Heating volume (min-max)	m <sup>3</sup>	72 - 240
Nominal CO at 13% O <sub>2</sub>	%	0,0095
Reduced CO at 13% O <sub>2</sub>	%	0,0139
Nominal dust content at 13% O <sub>2</sub>	mg/Nm <sup>3</sup>	16,5
Boiler capacity (H <sub>2</sub> O)	l	-
Hopper capacity	kg	17,5
Combustible		Pellet ø6
Hourly consumption (min-max)	kg/h	0,66 - 2,24
Autonomy (min-max)	h	6,7 - 22,7
Ignition electrical absorption (max)	W	340
Operating electrical absorption (max)	W	51
Supply and frequency	V - Hz	230 - 50
Chimney flue depression	Pa	10
Exhaust diameter	mm	80
Combustion air inlet diameter	mm	60
Mass of smoke (min-max)	g/sec	2,5 - 5,6
Exhaust fumes temperature (max)	°C	215
Net weight	kg	105
Gross weight	kg	115
Exhaust fumes	see	A
Hole combustion air inlet	see	B
Ducting outlet	see	C



Art. 15A B-VG 2015  
BImSchV 2015  
Regenröhrung  
München  
Stuttgart  
Aachen

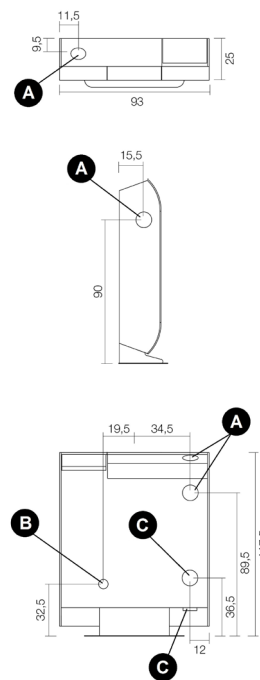

### MATCH

7017033	NEUTRAL STRUCTURE	EAN 8033123618328
6917035	Anthracite steel	EAN 8033123619172
6917036	White steel	EAN 8033123619189
6917037	Light bronze steel	EAN 8033123619196
6917038	Red steel	EAN 8033123619202
6917039	Silver steel	EAN 8033123619219

### PLUS



Sealed chamber



Cast iron burning pot



Overheating protection



Duction with 1 independent motor



Comfort mode



Wi-Fi kit (optional)



Remote control



Daily weekly programming




Connection to the external thermostat



Upper, back and lateral exhaust


### STOVE PACKING



L (cm)	H (cm)	P (cm)
120	54,6	120


VOLUME (m <sup>3</sup> )
0,79

### LINING PACKING



	L (cm)	H (cm)	P (cm)
steel	31	18	115

### STOCKING



### TRANSPORT

