


SIRE³ PLUS

PELLET AIR PLUS - Pellet stoves



Nominal power	kW	10,5
Reduced power	kW	2,8
Nominal water useful power	kW	-
Reduced water useful power	kW	-
Nominal efficiency	%	87,1
Reduced efficiency	%	93
Heating volume (min-max)	m ³	67 - 252
Nominal CO at 13% O ₂	%	0,007
Reduced CO at 13% O ₂	%	0,03
Nominal dust content at 13% O ₂	mg/Nm ³	12
Boiler capacity (H ₂ O)	l	-
Hopper capacity	kg	22
Combustible		Pellet ø6
Hourly consumption (min-max)	kg/h	0,6 - 2,4
Autonomy (min-max)	h	9,2 - 36,7
Ignition electrical absorption (max)	W	352
Operating electrical absorption (max)	W	77
Supply and frequency	V - Hz	230 - 50
Chimney flue depression	Pa	11
Exhaust diameter	mm	80
Combustion air inlet diameter	mm	60
Mass of smoke (min-max)	g/sec	3,1 - 6,5
Exhaust fumes temperature (max)	°C	228
Net weight	kg	115
Gross weight	kg	125
Exhaust fumes	see	A
Hole combustion air inlet	see	B
Ducting outlet	see	C

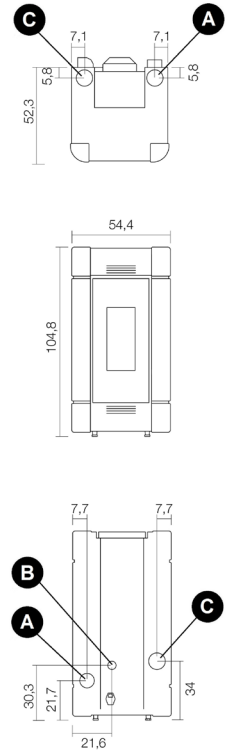

Art. 15A B-VG 2015
BlmSchV 2015
Regensburg
München
Stuttgart
Aachen



A+

PLUS



Sealed chamber



Cast iron burning pot



Overheating protection



Duction with 1 independent motor



Comfort mode



Wi-Fi kit (optional)



Remote control



Daily weekly programming



Connection to the external thermostat




Upper and back exhaust

MATCH

7014017	NEUTRAL STRUCTURE	EAN 8033123614726
6914020	Ivory majolica	EAN 8033123614948
6914021	White majolica	EAN 8033123614955
6914022	Red majolica	EAN 8033123614962


STOVE PACKING



L (cm)	H (cm)	P (cm)
80	124,5	70


VOLUME (m ³)	0,70
--------------------------	------

LINING PACKING



	L (cm)	H (cm)	P (cm)
majolica	55	13	107

STOCKING



TRANSPORT

